


ASI-1210

Secondary Impact Crusher

Model	: ASI-1210
Capacity	: 100-175 tons/hour
Rotor Dimensions	: 1.200 x 1.000 mm.
Drive	: <input type="checkbox"/> 132 kW. <input type="checkbox"/> 185 kW.
Inlet Opening	: 1.300 x 1.000 mm.
Max Feed Size- Limestone	: 200 mm.
Max Feed Size – Hard Stone	: 120 mm.
Side Plate on Body	: 15 mm.
Hydraulic assistance for crusher settings and maintenance.	
Bearings	: Heavy Duty Spherical Roller type SKF brand.
Bearing Housing	: Cast Iron.
Rotor Weight	: 3.500 kg.
Hammer Weight	: 146 kg. <input type="checkbox"/> Mn. <input type="checkbox"/> Cr. – 280 kg. <input type="checkbox"/> Mn. <input type="checkbox"/> Cr.

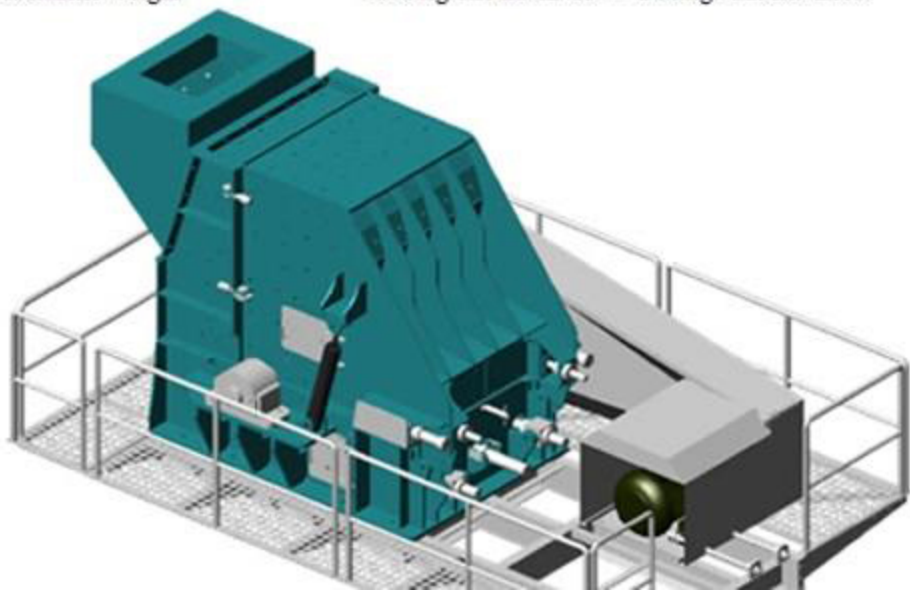


ASI-1212

Poz No.....: Sekonder Darbeli Kırıcı :

Modeli	: ASI-1212
Kapasite	: 150-250 ton/saat
Rotor Ölçüleri	: 1.200 x 1.250 mm.
Tahrik	: <input type="checkbox"/> 185 kW. <input type="checkbox"/> 200 kW. <input type="checkbox"/> 250 kW.
Ağız Ölçüleri	: 1.300 x 1.100 mm.
Max Besleme - Kalker	: 250 mm.
Max Besleme - Sert Malzeme	: 175 mm.
Açılan gövde sac kalınlığı	: 15 mm.
Hidrolik kumandalı öğütücüler ve hidrolik açılır gövde,	
Rulmanlar	: Çift sıra oynak masuralı manşonlu SKF rulmanlı.
Rulman Yatağı	: Hacıbalı marka , çelik döküm.
Rotor Ağırlığı	: 4.630 kg.
Palet Ağırlığı	: 178 kg. <input type="checkbox"/> Mn. <input type="checkbox"/> Cr. - 360 kg. <input type="checkbox"/> Mn. <input type="checkbox"/> Cr.


Rotor, tüm kaynak işlemleri tamamlandıktan sonra gerilim giderme tavlı işlemine tabi tutulmaktadır. Ayrıca SAE 4140 rotor mili, normalize edilerek 30-35 Rockwell yüzey sertleştirmeye tabi tutulmaktadır. Beton ayak montajlı.

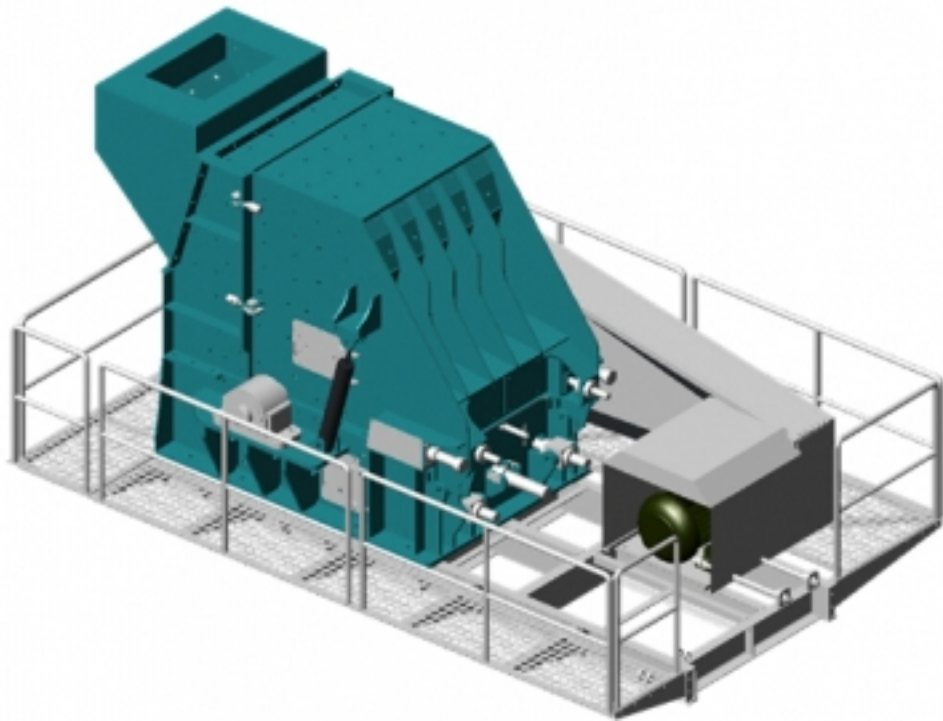

ASI-1215

Secondary Impact Crusher


Model	: ASI-1215
Capacity	: 200 – 400 tons/hour
Rotor Dimensions	: 1.200 x 1.500 mm.
Drive	: <input type="checkbox"/> 200 kW. <input type="checkbox"/> 315 kW.
Inlet Opening	: 1.600 x 1.100 mm.
Max Feed Size- Limestone	: 300 mm.
Max Feed Size – Hard Stone	: 200 mm.
Side Plate on Body	: 15 mm.
Hydraulic assistance for crusher settings and maintenance.	
Bearings	: Heavy Duty Spherical Roller type SKF brand.
Bearing Housing	: Cast Iron.
Rotor Weight	: 6.340 kg.
Hammer Weight	: 435 kg. <input type="checkbox"/> Mn. <input type="checkbox"/> Cr. .

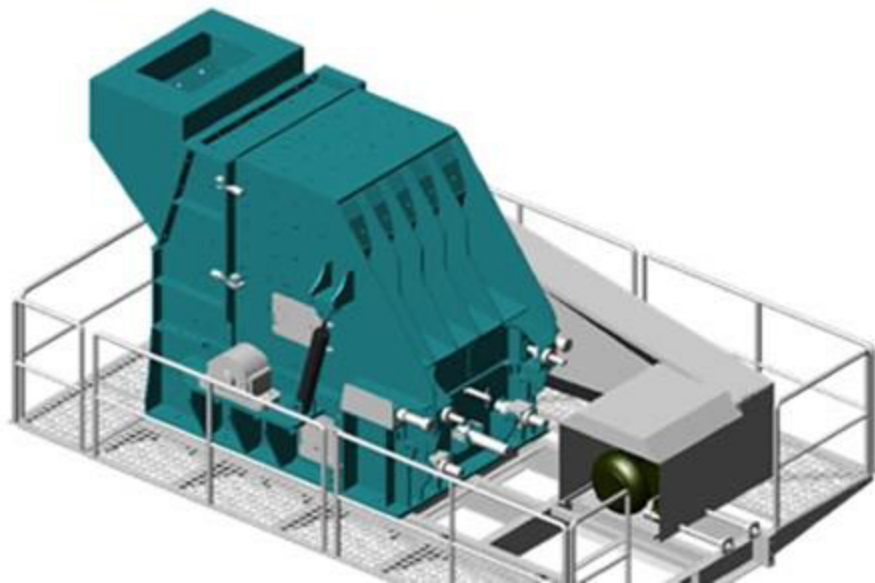

ASI-1414

Secondary Impact Crusher

Model	: ASI-1414
Capacity	: 300-450 tons/hour
Rotor Dimensions	: 1.430 x 1.4000 mm.
Drive	: <input type="checkbox"/> 200 kW <input type="checkbox"/> 315 kW.
Inlet Opening	: 1.440 x 1.100 mm.
Max Feed Size- Limestone	: 350 mm.
Max Feed Size – Hard Stone	: 250 mm.
Side Plate on Body	: 20 mm.
Hydraulic assistance for crusher settings and maintenance.	
Bearings	: Heavy Duty Spherical Roller type SKF brand.
Bearing Housing	: Cast Iron.
Rotor Weight	: 7.630 kg.
Hammer Weight	: 320 kg. Cr.

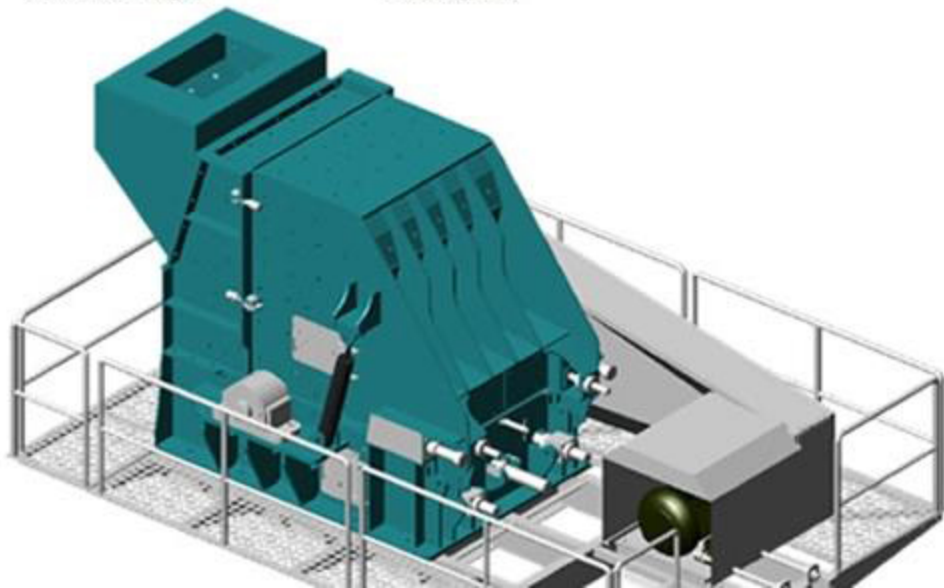

ASI-1416

Secondary Impact Crusher

Model	: ASI-1416
Capacity	: 400-500 tons/hour
Rotor Dimensions	: 1.430 x 1.600 mm.
Drive	: <input type="checkbox"/> 250 kW. <input type="checkbox"/> 355 kW.
Inlet Opening	: 1.700 x 1.100 mm.
Max Feed Size- Limestone	: 350 mm.
Max Feed Size - Hard Stone	: 255 mm.
Side Plate on Body	: 30 mm.
Hydraulic assistance for crusher settings and maintenance.	
Bearings	: Heavy Duty Spherical Roller type SKF brand.
Bearing Housing	: Cast Iron.
Rotor Weight	: 9.010 kg.
Hammer Weight	: 365 kg. Cr.

