


## AVS-2050-U-3

### Vibrating Screen


Model	: AVS-2050-U-3
Main Dimensions	: L: 5.000 x W: 2.000 mm
Number of Decks	: 3
Screening Area	: 3 x 10 m <sup>2</sup>
Drive	: 22 kW Driven On Top
Angle of Screen	: 18°
Stroke	: 6-9 mm
Carrying Speed	: 0.45 m/sec
Structure of Body	: 10 mm. Erdemir A1 quality side plate. Bolt connected
Cloth Tightening	: Easy cloth replacement by the special bolts.
Front Chute	: Front chute can be opened by the rail system for easy cloth replacement.

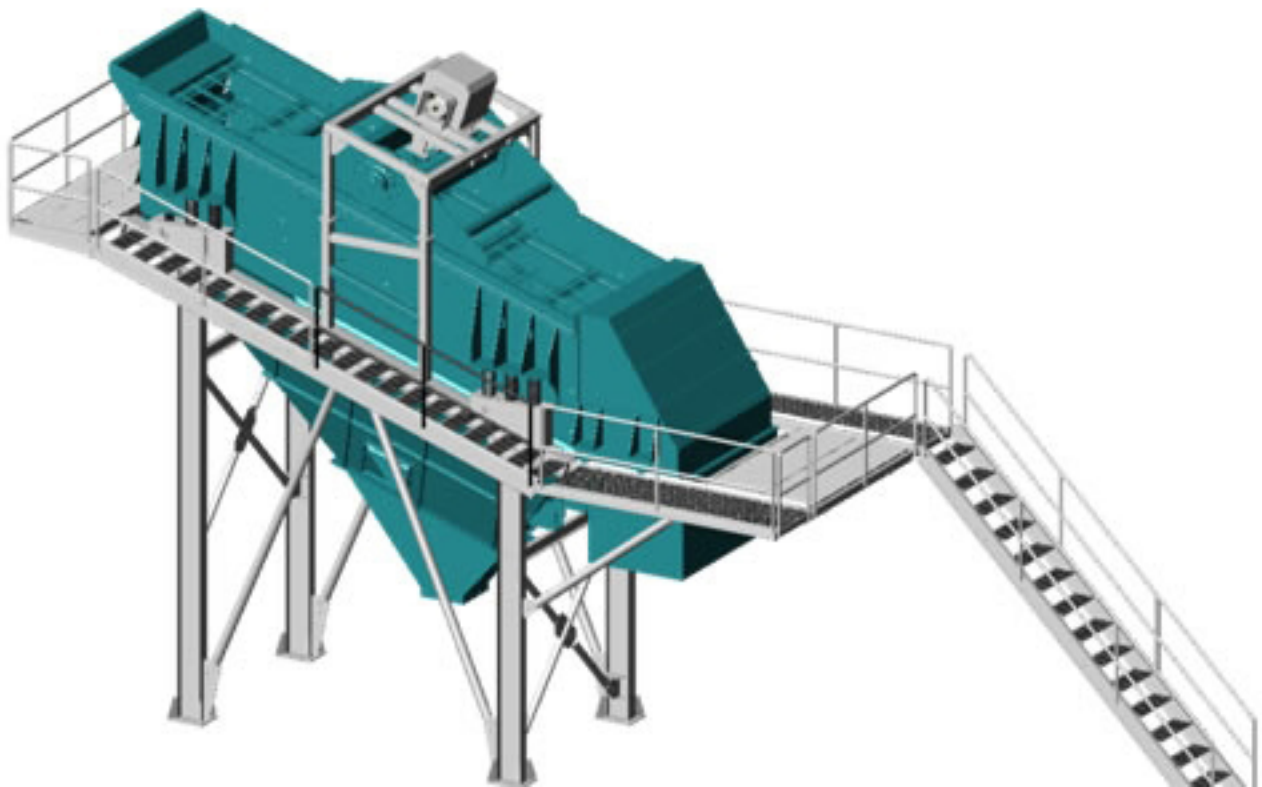

## AVS-2050-U-4

### Vibrating Screen


Model	: AVS-2050-U-4
Main Dimension	: L: 5.000 x W: 2.000 mm
Number of Decks	: 4
Screening Area	: 4 x 10 m <sup>2</sup>
Drive	: 22 kW Driven On Top
Angle of Screen	: 18°
Stroke	: 6-9 mm
Carrying Speed	: 0.45 m/sec
Structure of Body	: 10 mm. Erdemir A1 quality side plate. Bolt connected
Cloth Tightening	: Easy cloth replacement by the special bolts.
Front Chute	: Front chute can be opened by the rail system for easy cloth replacement.

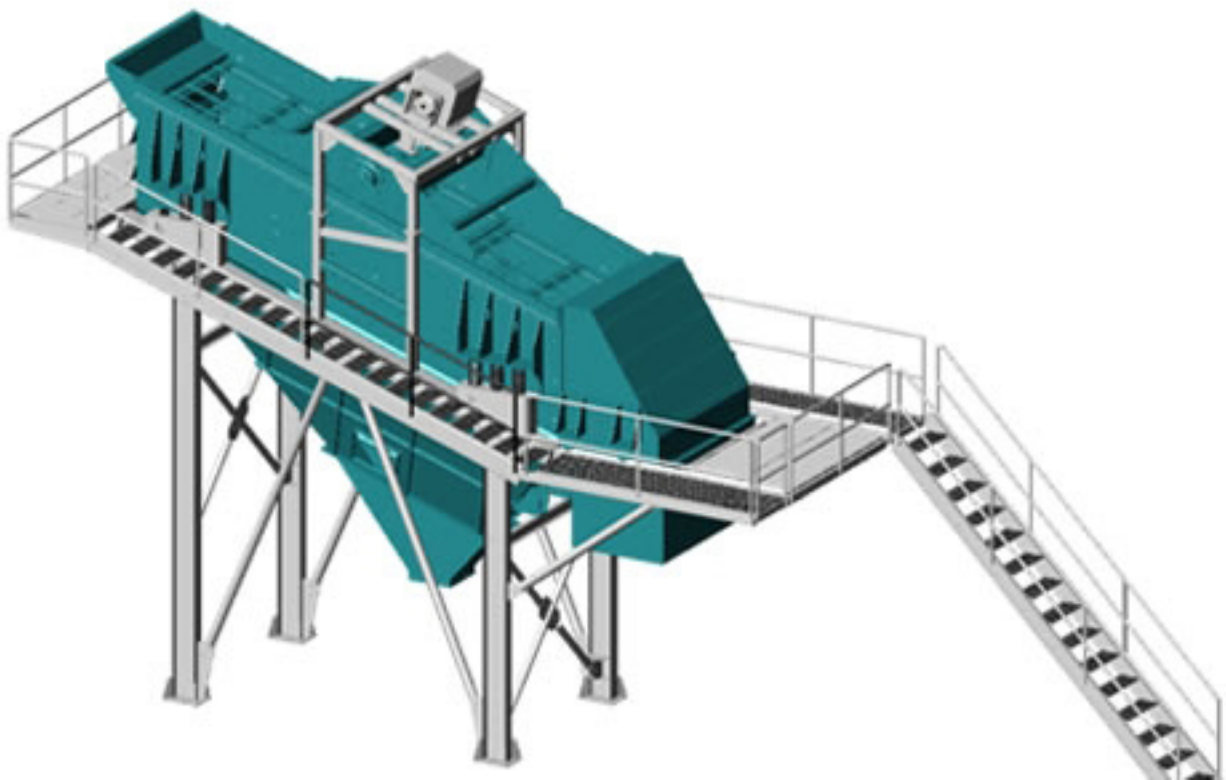

## AVS-2060-U-3

### Vibrating Screen

Model	: AVS-2060-U-3
Main Dimension	: L: 6.000 x W: 2.000 mm
Number of Decks	: 3
Screening Area	: 3 x 12 m <sup>2</sup>
Drive	: 30 kW. Driven On Top
Angle of Screen	: 18°
Stroke	: 6-9 mm
Carrying Speed	: 0.45 m/sec
Structure of Body	: 10 mm. Erdemir A1 quality side plate. Bolt connected.
Cloth Tightening	: Easy cloth replacement by the special bolts.
Front Chute	: Front chute can be opened by the rail system for easy cloth replacement.
Bearings	: SKF brand.

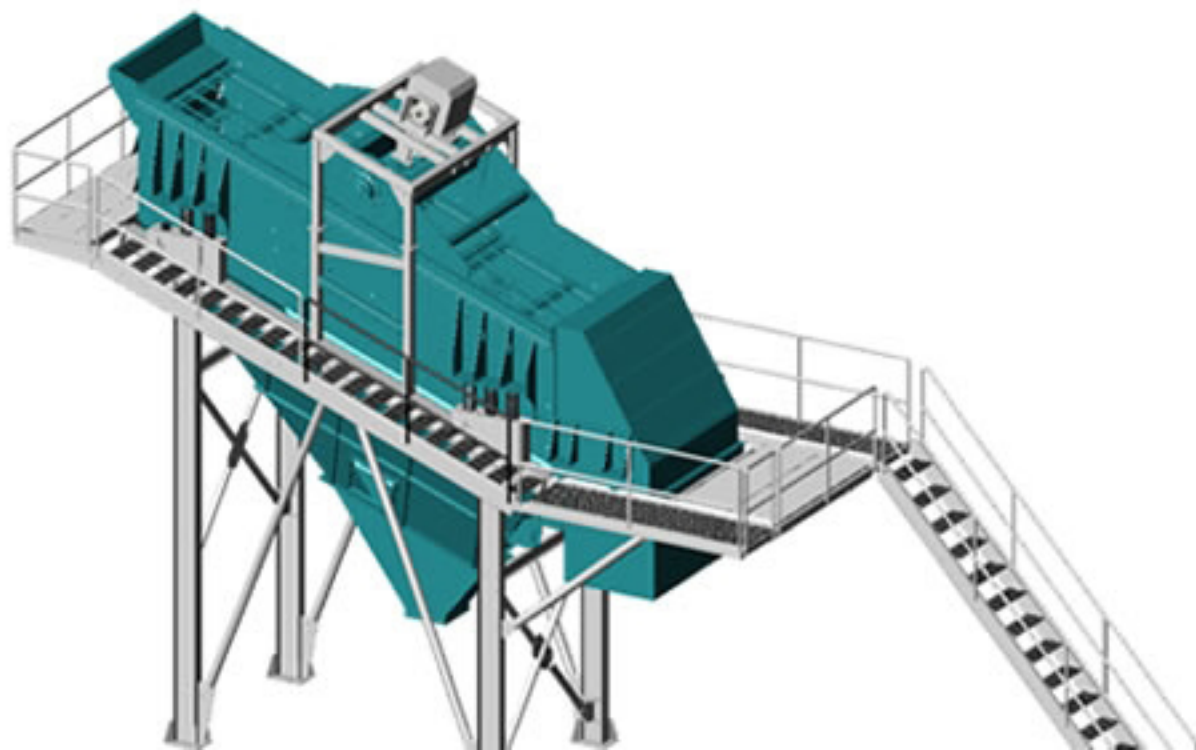

## AVS-2060-U-4

### Vibrating Screen

Model	: AVS-2060-U-4
Main Dimension	: L: 6.000 x L: 2.000 mm
Number of Decks	: 4
Screening Area	: 4x12 m <sup>2</sup>
Drive	: 30 kW Driven On Top
Angle of Screen	: 18°
Stroke	: 6-9 mm
Carrying Speed	: 0.45 m/sec
Structure of Body	: 10 mm. Erdemir A1 quality side plate. Bolt connected
Cloth Tightening	: Easy cloth replacement by the special bolts.
Front Chute	: Front chute can be opened by the rail system for easy cloth replacement.

